ergotron®

Dimensional & Range of Motion Illustrations

SIM90 Signage Integration Mount

Dimensions

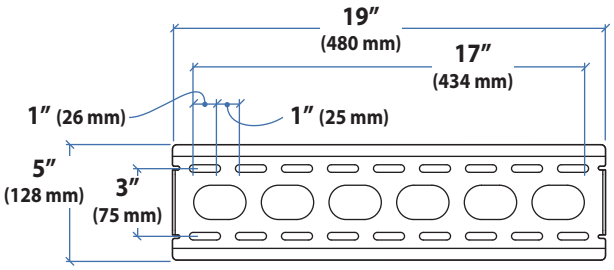

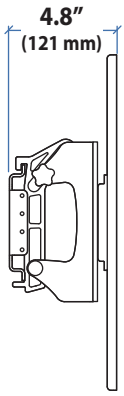

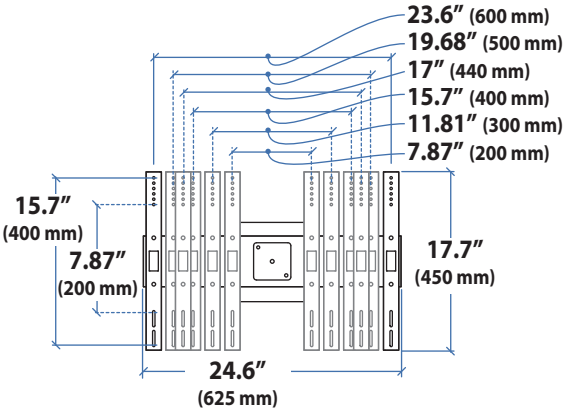

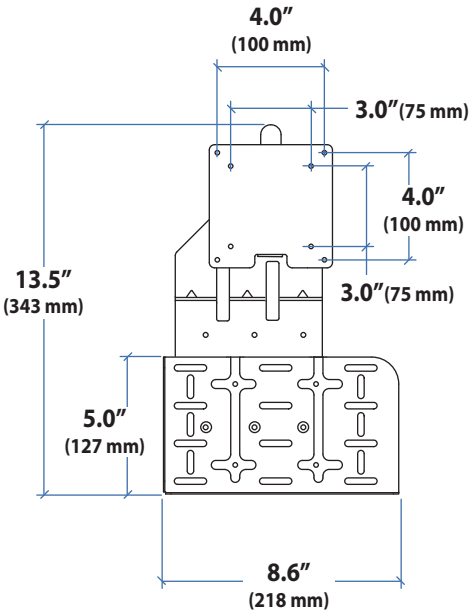

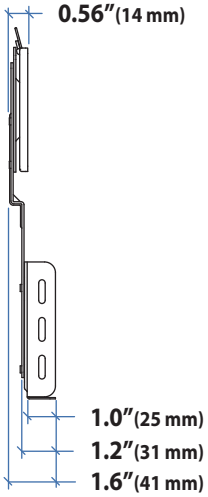

Optional mounting locations

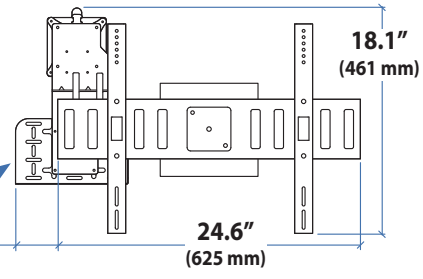

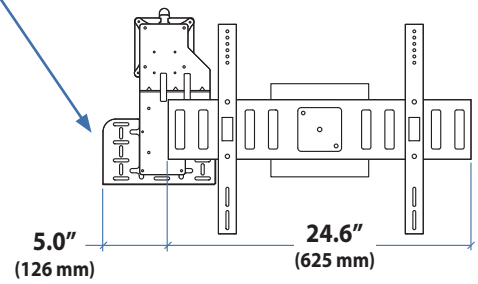

Maximum CPU Dimensions



CPU must be a VESA compliant Thin Client CPU.



Quick Release bracket for easy CPU attachment and removal.
(Can be disabled for theft deterrence.)

© 2009 Ergotron, Inc. rev. 10/07/2019 DIM-SIM90 Content is subject to change without notification

Americas Sales and Corporate Headquarter	EMEA Sales	APAC Sales	Worldwide OEM Sales
St. Paul, MN USA (800) 888-8458 +1-651-681-7600 www.ergotron.com sales@ergotron.com	Amersfoort, The Netherlands +31 33 45 45 600 www.ergotron.com info.eu@ergotron.com	Tokyo, Japan www.ergotron.com apaccustomerservice@ergotron.com	www.ergotron.com info.oem@ergotron.com

Ergotron®

SIM90 Signage Integration Mount

Dimensional & Range of Motion Illustrations

Weight Capacity

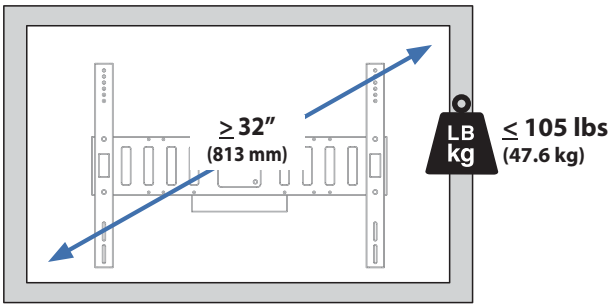

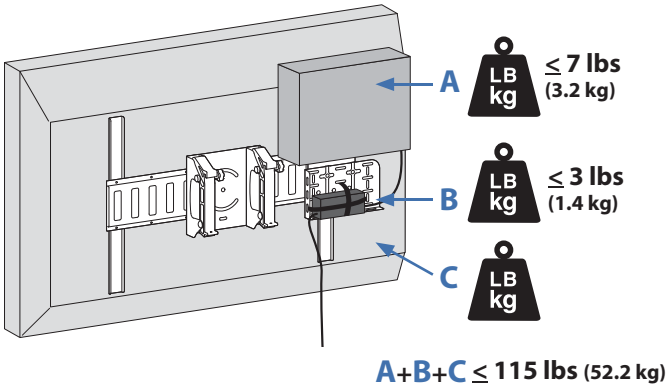

A+B+C ≤ 115 lbs (52.2 kg)

Range of Motion





© 2009 Ergotron, Inc. rev. 10/07/2019 DIM-SIM90 Content is subject to change without notification

Americas Sales and Corporate Headquarter	EMEA Sales	APAC Sales	Worldwide OEM Sales
St. Paul, MN USA (800) 888-8458 +1-651-681-7600 www.ergotron.com sales@ergotron.com	Amersfoort, The Netherlands +31 33 45 45 600 www.ergotron.com info.eu@ergotron.com	Tokyo, Japan www.ergotron.com apaccustomerservice@ergotron.com	www.ergotron.com info.oem@ergotron.com