




## S10

Self-service Kiosk

- Fashionable and rugged design
- Support wall-mount
- Suitable for multiple scenarios



### Dimensions

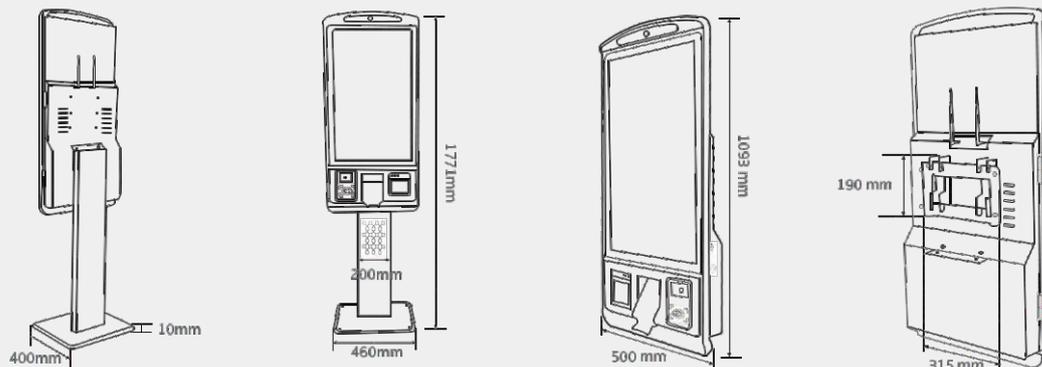


## S10

Self-service Kiosk

- Fashionable and rugged design
- Support wall-mount
- Suitable for multiple scenarios



### Dimensions

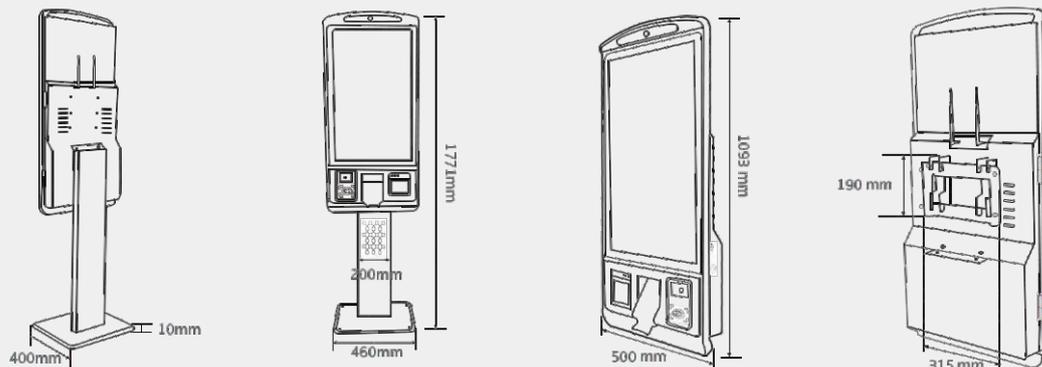

# S10

32"Self-service kiosk



# S10 Data Sheet

Main Specification		
Processor	Intel Quad-Core Processor J3455 (up to 2.3 GHz)	Intel Core I5 Broadwell
Memory	DDR4 4GB 2133MHz (Max. 8GB)	4GB DDR3L SO-DIMM 1333/1600MHz (Max. 16GB)
Storage	M.2 SSD64GB(Max. 256GB)	M-SATA SSD64GB(Max. 256GB)
Power Supply	12V/5A(Kiosk)&24V/2.5A(Printer)	12V/5A(Kiosk)&24V/2.5A(Printer)
OS Support	Win 7/Win 10 IoT	Win 7/Win 10 IoT
Built-in Thermal Printer	3", 170mm/s, Auto Cutte, USB Interface	3", 170mm/s, Auto Cutte, USB Interface
Display & Touch		
Display	32" TFT LCD Display	32" TFT LCD Display
Resolution	1920*1080	1920*1080
Brightness	300 cd/m	300 cd/m
Touch	True-flat PCAP Touch Screen (Support Multi-touch)	True-flat PCAP Touch Screen (Support Multi-touch)
I/O Expansion		
Serial Port	DB9*2(Max. 3)	DB9*2(Max. 3)
USB Port	USB3.0*4 + USB2.0*2	USB3.0*2 + USB2.0*4
LAN Port	10/100/1000 MB*1	10/100/1000 MB*1
Display Port	VGA*1, HDMI*1	VGA*1, HDMI*1
Audio	Line-out*1, Mic-in*1	Line-out*1, Mic-in*1
Expansion Slot	Mini-PCIe slot*1	Mini-PCIe slot*1
Physical Parameter		
Product Dimensions	500mm(L)*400mm(W)*1770mm(H)	500mm(L)*400mm(W)*1770mm(H)
Packing Dimensions	Kiosk? 610mm(L)*240mm(W)*1205mm(H) Column ? 267mm(L)*108mm(W)*1070mm(H) Base: 530mm(L)*480mm(W)*13mm(H)	Kiosk? 610mm(L)*240mm(W)*1205mm(H) Column ? 267mm(L)*108mm(W)*1070mm(H) Base: 530mm(L)*480mm(W)*13mm(H)
Gross Weight	Kiosk? 26.6KG Column ? 6.7KG Base: 15.5KG	Kiosk? 26.6KG Column ? 6.7KG Base: 15.5KG
Environmental		
Operating Condition	0 C - 40 C, 20%RH - 90%RH	0 C - 40 C, 20%RH - 90%RH
Storage Condition	-20? ~ 70? , 10%RH - 90%RH	-20? ~ 70? , 10%RH - 90%RH
Options&Peripherals		
2D Barcode Scanner	Accuracy?5mil, read distance?20cm, USB Interface	Accuracy?5mil, read distance?20cm, USB Interface
RFID Reader	13.56MHz, read distance: 5cm, USB Interface, Reader/Writer	13.56MHz, read distance: 5cm, USB Interface, Reader/Writer
Web Camera	2million pixels, Object distance: 15CM-80CM, View Angle: 65 , USB Interface	2million pixels, Object distance: 15CM-80CM, View Angle: 65 , USB Interface
WIFI	802.11b/g/n 2.4G	802.11b/g/n 2.4G

## I/O Interfaces



- ① DC-IN    ② HDMI    ③ VGA
- ④ USB\*2    ⑤ LAN    ⑥ USB\*2
- ⑦ AUDIO

# S10 Data Sheet

Main Specification		
Processor	RK3288 Quad-core Cortex-A17 up to 1.8GHz	Rk3399 Dual-core Cortex-A72 up to 1.8GHz Quad-core Cortex-A53 up to 1.4GHz
Memory	DDR3 2GB	DDR3 4GB
Storage	EMMC FLASH 16GB	EMMC FLASH 16GB
Power Supply	12V/5A(Kiosk)&24V/2.5A(Printer)	12V/5A(Kiosk)&24V/2.5A(Printer)
OS Support	Android 7.1.2	Android 7.1.2
Built-in Thermal Printer	3", 170mm/s, Auto Cutte, USB Interface	3", 170mm/s, Auto Cutte, USB Interface
Display & Touch		
Display	32" TFT LCD Display	32" TFT LCD Display
Resolution	1920*1080	1920*1080
Brightness	300 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>
Touch	True-flat PCAP Touch Screen (Support Multi-touch)	True-flat PCAP Touch Screen (Support Multi-touch)
I/O Expansion		
Serial Port	DB9*1	DB9*1
USB Port	USB2.0*4	USB2.0*2 + USB3.0*2
LAN Port	10MB/100MB*1	10MB/100MB*1
Cash Drawer Port	RJ11*1	RJ11*1
Memory Card Port	TF*1	TF*1
Display Port	HDMI*1	/
Audio	Line-out*1, Mic-in*1	Line-out*1, Mic-in*1
Expansion Slot	Mini-PCIe slot*1	Mini-PCIe slot*1
Physical Parameter		
Product Dimensions	500mm(L)*400mm(W)*1770mm(H)	500mm(L)*400mm(W)*1770mm(H)
Packing Dimensions	Kiosk? 610mm(L)*240mm(W)*1205mm(H) Column? 267mm(L)*108mm(W)*1070mm(H) Base: 530mm(L)*480mm(W)*13mm(H)	Kiosk? 610mm(L)*240mm(W)*1205mm(H) Column? 267mm(L)*108mm(W)*1070mm(H) Base: 530mm(L)*480mm(W)*13mm(H)
Gross Weight	Kiosk? 26.6KG Column? 6.7KG Base: 15.5KG	Kiosk? 26.6KG Column? 6.7KG Base: 15.5KG
Environmental		
Operating Condition	0°C - 40°C, 20%RH - 90%RH	0°C - 40°C, 20%RH - 90%RH
Storage Condition	-20? ~ 70? , 10%RH - 90%RH	-20? ~ 70? , 10%RH - 90%RH
Options&Peripherals		
2D Barcode Scanner	Accuracy?5mil, read distance?20cm, USB Interface	Accuracy?5mil, read distance?20cm, USB Interface
RFID Reader	13.56MHz, read distance: 5cm, USB Interface, Reader/Writer	13.56MHz, read distance: 5cm, USB Interface, Reader/Writer
Web Camera	2million pixels, Object distance: 15CM-80CM, View Angle: 65°, USB Interface	2million pixels, Object distance: 15CM-80CM, View Angle: 65°, USB Interface
WIFI	802.11b/g/n 2.4G	802.11b/g/n 2.4G

## I/O Interfaces



- ① AUDIO    ② LAN    ③ USB\*2
- ④ USB\*2    ⑤ COM    ⑥ VGA
- ⑦ DC-IN



Digital Business Transformation | Customer Experience (CX) Solution | Cash Processing Solution | Teller Cash Recycler (TCR/TAU) | Multi-denomination CDM | Self-service Banking Solution | Digital Payment Solution | Cheque Processing Solution | Visual & Automatic Signature Verification System | Robotic Process Automation (RPA) | Digital Retail Solution | EDC and POS Terminal | Digital Signage with AI & CMS | Digital Forex Rate Display | Digital Wayfinding/Directory Solution | Ergonomic Solution | Centralized Maintenance Service | Digital Healthcare Solution | Banking & Office Equipment

	<b>30+ Years of Experiences</b>		<b>Trusted by Major Companies Across Sectors</b>		<b>Nationwide Technical Support with 100+ Service Points and 24/7 Helpdesk</b>		<b>Supported by more than 700 Dedicated Staff and Technicians</b>		<b>Core Competency in Self-Service Solutions and Digital Transformation Solutions</b>
--	---------------------------------	--	--	--	--	--	---	--	---

**JAKARTA (Head Office)** Jl. Lingkar Luar Barat No.1, Jakarta Barat 11750, Indonesia    **BANDUNG** +62-22 205 63705    **MEDAN** +62-61 453 2994    **DENPASAR** +62-361 499 323  
**SURABAYA** +62-31 593 0010    **YOGYAKARTA** +62-274 883 506    **SEMARANG** +62-24 764 34391

☎ 1500 913 (Sales)    ☎ 1500 013 (Helpdesk)    ✉ info@murni.co.id    PT Murni Solusindo Nusantara



ISO 9001:2015 Certified No. ID 14/02656