



Document S-ORD101005

LONDON Swivel Chair, blue 1 190.10

Quantity	Unit Price	Discount %
1	190.1	0

- ADD ITEM (+)
- CANCEL SALE (X)
- SUSPEND SALE (-)
- SELECT CUSTOMER (person icon)
- ADD COMMENT (comment icon)
- HISTORY (history icon)
- GIFT CARD MGT. (+)
- CASHIER MGT. (+)
- ORDER MGT. (+)

PAY 201.51

Cashier: AH Store: CRONUS Mode: Sale

T320+

POS TERMINAL



Elanda

T320+

POS Terminal


- Intel® CPU Elkhart Lake J6412, Sky Lake Core™ I3, I5
- 15" Industrial-grade LCD with PCT
- DDR4 memory
- VESA mount
- Modular options: 2nd Display, MSR (Combo), NFC, VFD



Dallas key
Magnetic strip
reader with



75*75mm
availability
Wall-mount




VFD 2lines*20
digits



9.7inch
2nd display

Dimensions

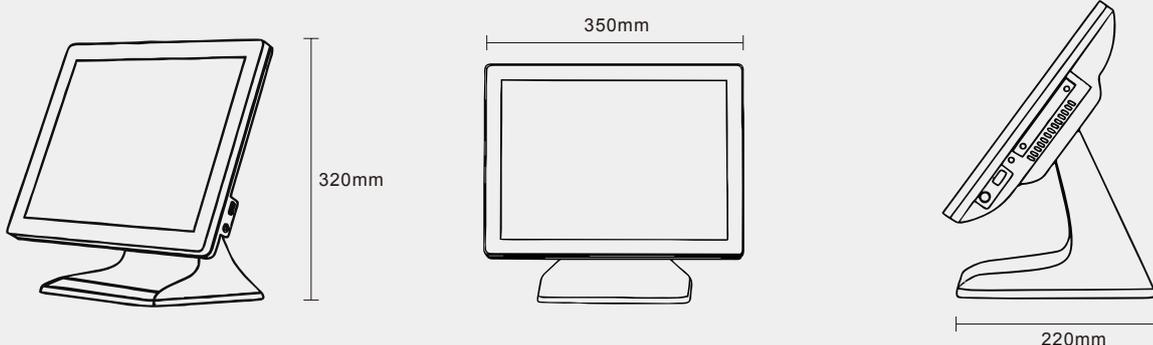

T320+ Data Sheet

Model Number		T320+	
CPU Support		Intel Elkhart Lake Celeron J6412, 2.0GHz, (up to 2.60 GHz), Fanless	Intel Core i3-Skylake, (3MB Cache), Fan, (Kaby Lake Optional) Intel Core i5-Skylake, (4MB Cache), Fan, (Kaby Lake Optional)
System Memory		1 x DDR4, SO-DIMM, 4GB (Max. 32GB)	1 x DDR4, SO-DIMM, 4GB (Max. 16GB)
Storage	SATA	N/A	
	mSATA/M.2	1 x mSATA / M.2 SSD 128GB (64GB/256GB/512GB optional)	1 x mSATA SSD 128GB (64GB/256GB/512GB optional)
LCD	Size	15" TFT LCD Panel	
	Brightness	250 ~ 450 cd/m2 (Typ.)	
	Resolution	1024 x 768	
Touch Screen		True-Flat Projected Capacitive Touch	
Tilt Angle		0 ~ 60 degree	
External I/O Port	USB	2 x USB 3.0+3 x USB 2.0	
	Serial port	2 x Serial port (DB9);	
	VGA	1 x VGA	
	HDMI	1 x HDMI	
	Cash Drawer Port	N/A	
	LAN	1 x LAN (10/100/1000Mb)	
	Audio	1 x Audio	
	DC-In	1 x DC In	
	DC-Out	1 x DC-Out (12V power)	
	Power Switch	1 x Power Switch	
Speaker		2 x 2W speaker (Optional)	
Power		External power adapter, 12V-5A/60W	
EMC Safety		CE, FCC, UKCA, ROHS	
Environment	Operating Temperature	0°C ~ 35°C	
	Storage Temperature	-15°C ~ 60°C	
	Operating Humidity	20% - 85% RH non condensing	
	Storage Humidity	20% - 85% RH non condensing	
OS Support		Windows 11/10 LTSC, Ubuntu 20.0.4	Windows 7/10, Ubuntu 18.0.4
Dimension (W x D x H)		350mm x 220mm x 320mm	
Weight (N.W.)		4.57kg	
Wall Mount		VESA 75 x 75mm	
Optional	WIFI	m.2 PCI-E WiFi/BT Module	
	MSR (USB)	MSR + iButton (Combo) or MSR +RFID (Combo), USB, 1, 2, 3 Track, ISO7810, 7811-1/2/3/4/5, IBM, AAMVA, JIS-2 Standard	
	Scanner	N/A	
	Customer display	VFD display, USB (VCOM), 2x20 characters	
	2nd Display	VGA, 9.7" (1024 x 768) VGA, 11.6" (1366 x 768) VGA, 12.1" (1280 x 800)	



Digital Business Transformation | Customer Experience (CX) Solution | Cash Processing Solution | Teller Cash Recycler (TCR/TAU) | Multi-denomination CDM | Self-service Banking Solution | Digital Payment Solution | Cheque Processing Solution | Visual & Automatic Signature Verification System | Robotic Process Automation (RPA) | Digital Retail Solution | EDC and POS Terminal | Digital Signage with AI & CMS | Digital Forex Rate Display | Digital Wayfinding/Directory Solution | Ergonomic Solution | Centralized Maintenance Service | Digital Healthcare Solution | Banking & Office Equipment

	30+ Years of Experiences		Trusted by Major Companies Across Sectors		Nationwide Technical Support with 100+ Service Points and 24/7 Helpdesk		Supported by more than 700 Dedicated Staff and Technicians		Core Competency in EDC & POS Terminal and Digital Transformation Solutions
--	---------------------------------	--	--	--	--	--	---	--	---

JAKARTA (Head Office) | Jl. Lingkar Luar Barat No.1, Jakarta Barat 11750, Indonesia | **BANDUNG** +62-22 205 63705 | **MEDAN** +62-61 453 2994 | **DENPASAR** +62-361 499 323 | **SURABAYA** +62-31 593 0010 | **YOGYAKARTA** +62-274 883 506 | **SEMARANG** +62-24 764 34391

1500 913 (Sales) | **1500 013 (Helpdesk)** | **info@murni.co.id** | **PT Murni Solusindo Nusantara**

